



## 321 409 410 904l Stainless Steel Coil Sheet Strip 2B Finish 50mm 4mm 5mm 6mm 8mm

Our Product Introduction

### Basic Information

- Place of Origin: china
- Brand Name: jinshunlai
- Certification: ISO, AISI, ASTM, GB, EN, DIN
- Model Number: 0.1mm-900mm
- Minimum Order Quantity: 1kg
- Price: Contact Us
- Packaging Details: Waterproof Paper, Steel Strip Packed and other Standard Export Seaworthy Package, or customized package
- Delivery Time: 5day
- Payment Terms: L/C, T/T, Western Union
- Supply Ability: 90000ton



### Product Specification

- Application: Construction, Decoration, Industry, Etc
- Edge: Slit Edge/Mill Edge
- Grade: 200/300/400 Series
- Length: 1000-6000mm
- Material: Stainless Steel
- Packing: Standard Export Packing
- Standard: ASTM, AISI, DIN, EN, GB, JIS
- Surface: 2B, BA, 8K, No.4, HL, Embossed, Etched, Etc
- Surface Treatment: Coil Sheet
- Thickness: 0.3-3mm
- Width: 1000-2000mm
- Highlight: **50mm Stainless Steel Coil Sheet, 904l Stainless Steel Coil Sheet, 2b finish stainless steel Strip**



for more products please visit us on [copper-solid.com](http://copper-solid.com)

## Product Description

### PRODUCT DESCRIPTION

#### SUS304 2b 1.0mm\*1219\*C Stainless Steel Strip

Corrosion resistance is better than 304 stainless steel pipe, in the pulp and paper production process has a good corrosion resistance. And 316 stainless steel is also resistant to Marine and aggressive industrial atmosphere erosion. Heat resistance in discontinuous use below 1600 degrees and continuous use below 1700 degrees, 316 stainless steel tubes have good oxidation resistance. There are different versions of the material with low carbon and high carbon content. The Tubes and UNS S316L00 Stainless Steel Strip Specification varies and the applications differ for the different versions of the material. The low carbon version, 316L Tubes are very good for welding applications as they have less carbide precipitation and less localized corrosion. The ASME SA240 Stainless Steel 316L Tube Thickness ranges up to 200mm and the width and the length ranges widely depending on the application requirements as well. Please contact us for more information and prices.

### Product Description

**Stainless steel** does not stain, corrode, or rust as easily as regular carbon steel and provides high strength and impact resistance along with the aesthetic appeal. The material also has anti-bacterial qualities and is easy to clean and sanitize.



**Stainless steel sheet** and **stainless steel plate** are both a perfect solution for applications that require a durable metal with anti-oxidation qualities.

We offer **Stainless steel sheet** and **stainless steel plate** with high quality and competitive price. And the material is manufactured by TISCO, BAOSTEEL, POSCO, LISCO and so on. Mainly used in architectural decoration, luxury doors, elevator decoration, metal tank shell, shipbuilding, train interior decoration, and outdoor engineering, advertising nameplates, ceilings and cabinets, aisle panels, screens, tunnel projects, hotels, guesthouses, entertainment venues, kitchens Equipment, light industry, etc.

Standard:	JIS, AISI, ASTM, GB, DIN, EN, JIS, AISI, ASTM, GB, DIN, EN, etc.	Place of Origin:	Jiangsu, China
Brand Name:	shuangheyi	Model Number:	201 304
Type:	Welded	Steel Grade:	300 Series
Application:	Industry/Construction	Certification:	ISO, AISI, ASTM, GB, EN, DIN, JIS
Welding Line Type:	ERW	Tolerance:	±1%
Processing Service:	Welding	Grade:	SS 304 SS316l
Product name:	Stainless Steel Sheet	Key Word:	Schedule 10 Stainless Steel Sheet
Surface:	Polished	Price Term:	CIF CFR FOB EX-WORK
MOQ:	1 Ton	Technique:	Hot Rolled , Cold Rolled , Extrusion
Payment:	L/C,T/T	Edge:	Mill Edge Slit Edge
Port:	Qingdao, China		

### Specification

ITEM	DESCRIPTION
Product Name	ss coil supplier hot roll coil price 430BA 304BA 201 stainless steel coil
Standard	JIS, AISI, ASTM, GB, DIN, EN, etc.
Certification	ISO, BV, SGS
Material	200 series 300 series 400 series 600 series
Model Number	304,304L,316L,316Ti,309S,310S,321,321H314,2205,S32205,,2507, S32750,600,631800H,825901,903,904L,N08904,,1.4529,N08926,317L , 317LN347H,348H(253MA,S30815),254SMO,S31254,25-6MOS32760440A, 440B,440CGH3030GH3039(C276,HC-276 Hastelloy)724L,725LN
Width	100mm, 500mm, 600mm, 1000mm, 1250mm, 1500mm, 1800mm, 2000mm, or, as required
Thickness	0.2mm-15mm, or as required
Technique	Cold Rolled, hot rolled
Surface Treatment	Polishing, Annealing, Pickling, Bright, or as required
Surface Finished	BA/2B/NO.1/NO.3/NO.4/8K/HL/2D/1D, or as required
Thickness Tolerance	±0.05mm, or as required
Package	Standard export seaworthy package . Water proof paper+Metal pallet+Angle bar protection+Steel belt or as required.
Payment	L/C at sight or 30% TT as deposit and the balance paid against copy of B/L, west union, money gram
Price Term	CIF, CFR, FOB, EX-WORK
Loading Port	Shanghai, Lianyungang, Tianjin, Ningbo,China
Place of Origin	Jiangsu, China
Delivery Time	Prompt delivery 7-15 days after deposit or as order quantity.
MOQ	1 ton , sample or trial order acceptable
Sample	free provided, courier fee by the buyer's side.
Advantages	Showing the splendor of your quality, wear-resistant as well, strong corrosion resistance and decorative effect.
Application	Stainless coil is commonly used in kitchen equipment, furnace parts, heat exchangers and decorative applications, etc
Container Size	20ft GP: 5898mm(Length)x2352mm(Width)x2393mm(High) 40ft GP: 12032mm(Length)x2352mm(Width)x2393mm(High) 40ft HC: 12032mm(Lengh)x2352mm(Width)x2698mm(High)

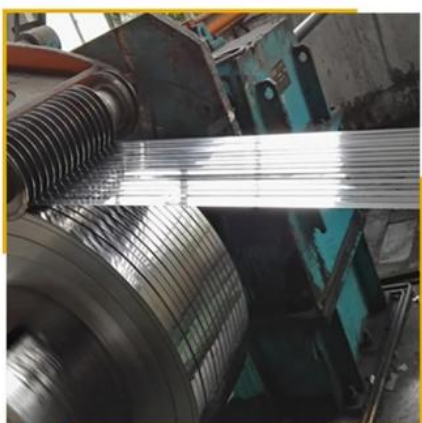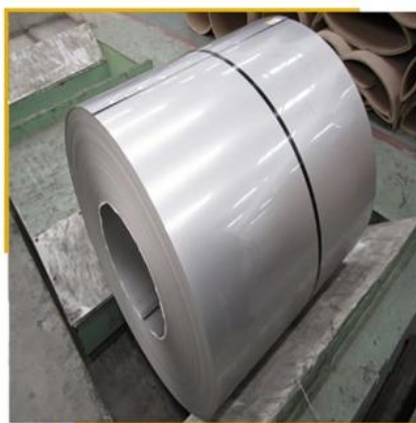

## Product Display

Surface finish	Definition	Application
2B	Those finish, after cold rolling, by heat treatment or other equivalent treatment and lastly by cold rolling to given appropriate luster	Medical equipment, food industry, construction material, kitchen utensils
BA	Medical equipment, food industry, construction material, kitchen utensils	Kitchen utensils, electric equipment, buliding construction
NO.4	Those finished by polishing with NO.180 abrsvivea specified in JIN R6001	Kitchen utensils, buliding construction, medical equipement
HL	Those finished polishing so as to give continuous polishing streaks by using abrasive of suitable grain size	Buliding construction
8K	A mirror like reflective surface by polidhing with finer abrasive over 800 mesh	Reflector, mirror, interior-exterior decoration

## Stainless Steel Composition Chart, Percentage (%)

Gra de	C, ≤	Mn, ≤	P, ≤	S, ≤	Si , ≤	Cr	Ni	Mo	N, ≤
304	0.08	2	0. 04 5	0. 03	1	18.0- 20.0	8.0- 11.0	-	-
304 L	0.03	2	0. 04 5	0. 03	1	18.0- 20.0	8.0- 11.0	-	-
316	0.08	2	0. 04 5	0. 03	1	16.0- 18.0	10.0- 14.0	2.00- 3.00	-
316 L	0.03	2	0. 04 5	0. 03	1	16.0- 18.0	10.0- 14.0	2.00- 3.00	-
321	0.08	2	0. 04 5	0. 03	1	17.0- 19.0	9.0- 12.0	-	0.1
201	0.15	5.50- 7.50	0. 06	0. 03	1	16.0- 18.0	3.5- 5.5	-	0.25
301	0.15	2	0. 04 5	0. 03	1	16.0- 18.0	6.0- 8.0	-	0.1
302	0.15	2	0. 04 5	0. 03	0. 7 5	17.0- 19.0	8.0- 10.0	-	0.1
303	0.15	2	0. 2	≥0 .1 5	1	17.0- 19.0	8.0- 10.0	-	-
305	0.12	2	0. 04 5	0. 03	1	17.0- 19.0	11.0- 13.0	-	-
308	0.08	2	0. 04 5	0. 03	1	19.0- 21.0	10.0- 12.0	-	-
309 S	0.08	2	0. 04 5	0. 03	1	22.0- 24.0	12.0- 15.0	-	-
310 S	0.08	2	0. 04 5	0. 03	1. 5	24.0- 26.0	19.0- 22.0	-	-
310 H	0.04- 0.10	2	0. 04 5	0. 03	0. 7 5	24.0- 26.0	19.0- 22.0	-	-
316 Ti	0.08	2	0. 04 5	0. 03	1	16.0- 18.0	10.0- 14.0	2.00- 3.00	0.1
317 L	0.03	2	0. 04 5	0. 03	0. 7 5	18.0- 20.0	11.0- 15.0	3.0- 4.0	0.1
321 H	0.04- 0.10	2	0. 04 5	0. 03	0. 7 5	17.0- 19.0	9.0- 12.0	-	-
347 H	0.04- 0.10	2	0. 04 5	0. 03	0. 7 5	17.0- 19.0	9.0- 13.0	-	-
348 H	0.04- 0.10	2	0. 04 5	0. 03	0. 7 5	17.0- 19.0	9.0- 13.0	-	-
220 5	0.03	2	0. 03	0. 02	1	22.0- 23.0	4.5- 6.5	3.0- 3.5	0.14- 0.20
250 7	0.03	1.2	0. 03 -	0. 02	0. 8	24.0- 26.0	6.0- 8.0	3.0- 5.0	0.24- 0.32

			5						
410	0.08-0.15	1	0.04	0.03	1	11.5-13.5	-	-	-
420	0.15, ≥	1	0.04	0.03	1	12.0-14.0	-	-	-
430	0.12	1	0.04	0.03	1	16.0-18.0	-	-	-
440 A	0.60-0.75	1	0.04	0.03	1	16.0-18.0	-	≤0.75	-
440 B	0.75-0.95	1	0.04	0.03	1	16.0-18.0	-	≤0.75	-
440 C	0.95-1.20	1	0.04	0.03	1	16.0-18.0	-	≤0.75	-
440 F	0.95-1.20	1.25	0.06	0.15	1	16.0-18.0	0.5	-	-
800 H	0.05-0.10	1.5	0.045	0.015	1	19.0-23.0	30.0-35.0	-	-
904 L	0.02	2	0.045	0.035	1	19.0-23.0	23.0-28.0	4.00-5.00	0.1
15-5 PH	0.07	1	0.04	0.03	1	14.0-15.5	3.5-5.5	-	-
17-4 PH	0.07	1	0.04	0.03	1	15.5-17.5	3.0-5.0	-	-
17-7 PH	0.09	1	0.04	0.04	1	16.0-18.0	6.5-7.75	-	-



**Wuxi Jinnuo copper Co.,Ltd**



+86-17763564398



sales01@shuangheyisteel.com



copper-solid.com

32 Chengnan Road, New District, Wuxi City, Jiangsu Province, China